

## Outdoor Air Conditioner OC 5725-230V



### Product Description

<b>Brand name:</b>	SoliTherm ComPact Outdoor
<b>Order Number:</b>	572500001
<b>Colour:</b>	RAL 7035
<b>Protection category IP (IEC 60 529):</b>	IP 56 (NEMA 12, 3, 3R, 4)
<b>Approvals:</b>	CE
<b>Customs tariff number:</b>	84158200
<b>Material housing:</b>	Mild steel, powder coated

## Technical data OC 5725-230V

<b>Cooling capacity / output L35L35:</b>	2.5 kW @ 50 Hz
	2.5 kW @ 60 Hz
<b>Cooling capacity / output L35L50:</b>	1.97 kW @ 50 Hz
	2.04 kW @ 60 Hz
<b>Heating capacity:</b>	1,500 W (optional)
<b>Compressor:</b>	Reciprocating compressor
<b>Refrigerant:</b>	R134a
<b>Refrigerant charge:</b>	480 g
<b>Operating temperature range:</b>	-20°C - +55°C
<b>Max. air volume flow:</b>	Ambient air circuit: 655 m <sup>3</sup> /h
	Cabinet air circuit: 400 m <sup>3</sup> /h
<b>Mounting:</b>	External
<b>Dimensions (H x W x D):</b>	1,550 x 495 x 355 mm
<b>Weight:</b>	68 kg
<b>Rated operating voltage / frequency:</b>	230 V - 50/60 Hz
<b>Rated current L35L35:</b>	3.9 A @ 50 Hz
	5.3 A @ 60 Hz
<b>Starting current:</b>	23 A
<b>Max. current:</b>	6.6 A
<b>Power consumption L35L35:</b>	910 W @ 50 Hz
	1,16 kW @ 60 Hz
<b>Max. power consumption:</b>	1,19 kW @ 50Hz
	1,48 kW @ 60 Hz
<b>Fuse rating:</b>	10 A (T)
<b>Connection:</b>	Connection terminal block


Click the graphics to download the originals.

More CAD graphics can be found on our [Products Downloads page](#).

> [Overview product group Cooling units - Outdoor](#)

**Performance Graph:**

T = Ambient temperatur  
 P = Cooling capacity

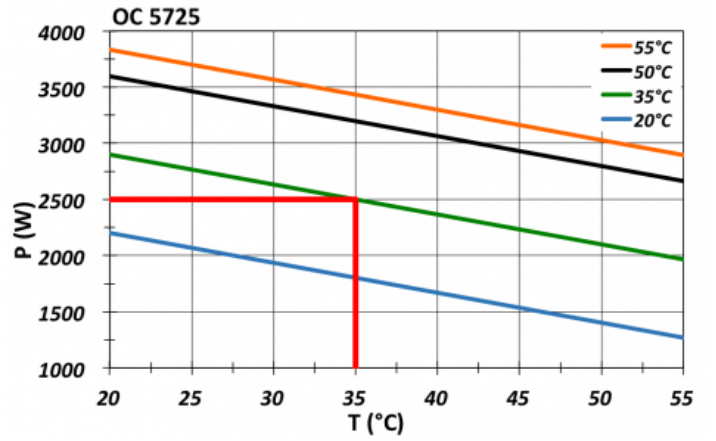

click image to enlarge

**Cutout diagram:**

click image to enlarge

[Datasheet](#) created 27.04.2015 (15:11:59). Technical rights reserved.