

Outdoor Air Conditioner OC 5709-120V



Product Description

Brand name:	SoliTherm ComPact Outdoor
Order Number:	570910001
Colour:	RAL 7035
Protection category IP (IEC 60 529):	IP 56 (NEMA 12,3, 3R, 4)
Approvals:	CE
Customs tariff number:	84158200
Material housing:	Mild steel, powder coated

Technical data OC 5709-120V

Cooling capacity / output L35L35:	880 W @ 60 Hz
Cooling capacity / output L35L50:	660 W @ 60 Hz
Heating capacity:	400 W (optional)
Compressor:	Reciprocating compressor
Refrigerant:	R134a
Refrigerant charge:	280 g
Operating temperature range:	-20°C - +55°C
Max. air volume flow:	Ambient air circuit: 315 m ³ /h Cabinet air circuit: 165 m ³ /h
Mounting:	External
Dimensions (H x W x D):	830 x 304 x 270 mm
Weight:	37 kg
Cut out dimensions:	265 x 180, 265 x 160 mm
Rated operating voltage / frequency:	120 V - 60 Hz
Rated current L35L35:	6.4 A
Starting current:	30 A
Max. current:	8.2 A
Power consumption L35L35:	640 W
Max. power consumption:	870 W
Fuse rating:	16 A (T)
Connection:	Connection terminal block

Click the graphics to download the originals.


More CAD graphics can be found on our [Products Downloads page](#).

> [Overview product group Cooling units - Outdoor](#)


Performance Graph:

T = Ambient temperatur

P = Cooling capacity

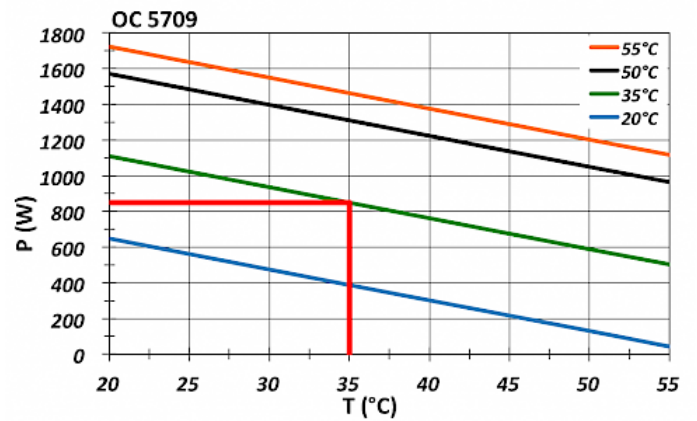

click image to enlarge

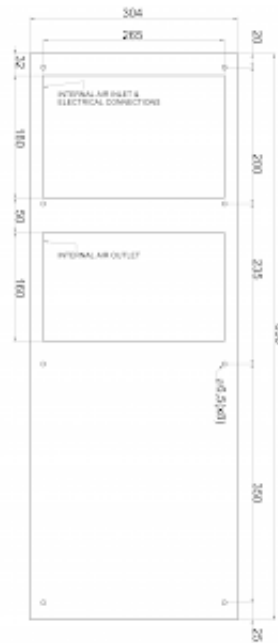Cutout diagram:


click image to enlarge

[Datasheet](#) created 22.07.2015 (10:20:08). Technical rights reserved.